

6 Channels DMX Relay Pack

LT-6002DAR 6 × 2kw

LT-6002DAR DMX Relay Pack , 2U high 19" rack with a wide range of features and socket options, is DMX controlled. It is equipped with MCB as standard to provide overload protection. With the manual operation element on the magnetic latching relay, it can be set as the emergency direct switch in case of the control system malfunction.



Main Features

- LCD display
- 6 Channel, 10A per channel with magnetic latching relay output
- MCB overload and SCR protection against short-circuit
- The relay can be manually operated via an operating element
- The relay is particularly suitable for switching loads with high peak inrush
- DMX512 input, opto-isolated protection
- Status Indication for DMX signals

Standards Compliance

- EMC: EN55015
- Safety: EN60204-1: 2006
EN60950-1: 2006
- Ingress Protection: IP2X

CE marked

Technique Parameters

- Power Supply: 3NPE 400V 50HZ TN-S system
- Supply Voltage Range: 230V±10%
- Rated Supply Current: 20A per phase at 230V


Mechanical Data

- Dimensions (mm): 483(W) × 88(H) × 340(D)
- Net weight: 6kg

Operation Environment

- Temperature: 0~40
- Humidity Range: 0~90% non condensing

Rear panel diagram

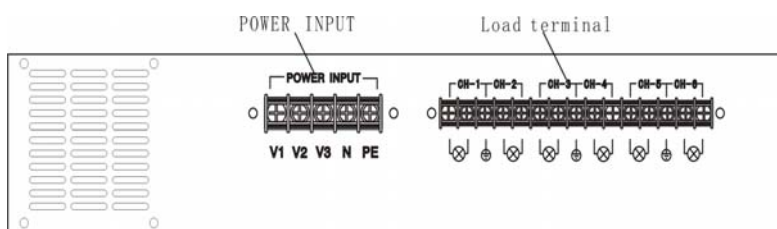

Load terminal: connecting luminaries.

POWER INPUT: L1, L2, L3, N, PE correspond with three phase power input, neutral, and protective earth respectively.




6 Channels DMX Relay Pack


LT-6002DAR 6 × 2kw

Socket option


- SOCEPEX 19 pin socket

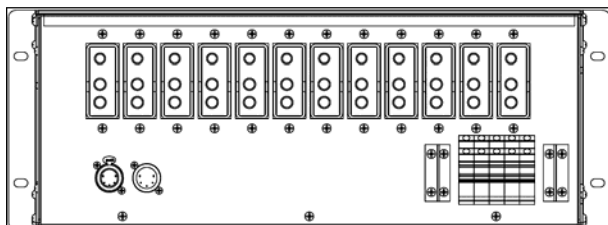

- Terminal

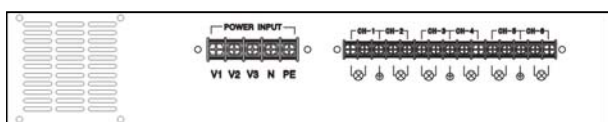

- SCHUKO

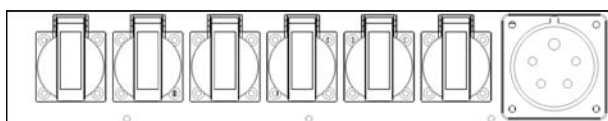

Ordering Information

Cat NO	Description
211001	6002DAR with SOCEPEX 19 pin socket
211002	6002DAR with terminal
211003	6002DAR with SCHUKO

BEIJING STARLIGHT ELECTRONICS CO.,LTD.

Address: NO. 7 Xingguang Lane, Xihongmen Town, Daxing District, Beijing 100162

Tel: +86 10 6025 9548, 6025 9546 **Fax:** +86 10 6025 9757

E-mail: mail@lightspace.com.cn

